



A A L B E R T S   D I S P E N S E   T E C H N O L O G I E S

# RECONFIGURING / REPLACING BUTTERFLY PLATES

Step by step image instruction on replacing or reconfiguring  
butterfly plates on the Schroeder America Bar Gun.

Presentation For  
Field Technicians



This information is confidential and proprietary to Schroeder America, San Antonio, Texas. Any reproduction or disclosure without consent may be unlawful.

# RECONFIGURING/REPLACING BUTTERFLY PLATES



- What you need
  - Bar Gun
  - Phillips Head Screw Driver
  - Replacement Butterfly Plates  
**(if needed)**
- Use the screw driver to remove the button plate from the bar gun handle by unscrewing the screws at the top and bottom of the plate



# RECONFIGURING/REPLACING BUTTERFLY PLATES (CONT.)


- Remove two screws securing butterfly plates
- Remove butterfly plates



# RECONFIGURING/REPLACING BUTTERFLY PLATES (CONT.)



- Place the reconfigured/replacement butterfly plates onto the handle
  - Be sure to align the ball bearings on the butterfly plate so that they fit within the indentions on the handle
  - The butterfly plate must not cover up the secure screw hole on the handle
- Secure the butterfly plates with the secure screw
  - Black washer must be in place (ensure it's correct)
  - **DO NOT OVERTIGHTEN SCREW!** This could impede the movement of the butterfly plate

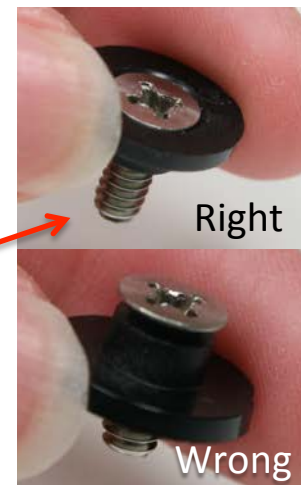

# RECONFIGURING/REPLACING BUTTERFLY PLATES (CONT.)



- Place the rest of the butterfly plates and secure the second screw into the handle
- Replace the button plate onto the handle
  - Screw the top and bottom screws into place on the handle
  - **Note: if the butterfly plates have been reconfigured, the buttons should reflect the new configuration, or product will not dispense properly**
- You've completed reconfiguring/replacing the butterfly plates

